



ma_valkyriecbip65_01_010002_en_200102

Valkyrie CB IP65

Conventional Wall Beacon Outdoor Use-IP65

MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.


Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL

Tel: **+351 289 896 560** • Sales: sales@globalfire.pt • Technical Support: techs@globalfire.pt • www.globalfire.pt**TECHNICAL SPECIFICATIONS**


SUPPLY VOLTAGE	20 V to 30 V DC
CURRENT - SOUNDER/BEACON ACTIVE	10 mA, 280 mW @ 28 V
CABLE SIZE	0.5-2.5 mm ²
RESET/STAR-UP TIMES	20 seconds max.
PROTECTION CATEGORY	Type B - Outdoor Use - Rating IP65
COLOUR / CASE MATERIAL	Red / ABS
OPER. TEMPERATURE / MAX. HUMIDITY	-25°C to 70°C / 95% RH Non-Condensing
DIMENSIONS / WEIGHT	112 (D) x 82 (H) mm / 205 g - 240 g including packaging

ORDER CODE**DESCRIPTION****VALKYRIE CB IP65**

CONVENTIONAL WALL MOUNTED BEACON - IP65 RATED

MECHANICAL SPECIFICATION

Please note that this device is polarised.

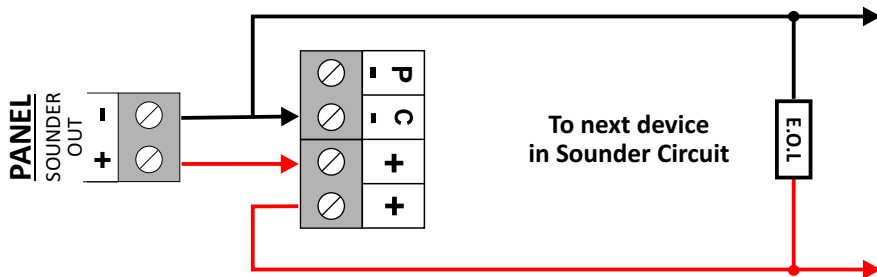

Terminals

C- Negative Supply Continuous

+ Positive Supply - IN

NOTE

Only last device in Sounder Circuit should have e.o.l. (end of line) fitted across + and - terminals.