



Valkyrie CS IP65

Conventional Wall Sounder/Beacon - Outdoor Use-IP65

MANUAL - 09/2017



MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.

Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL

Tel: +351 289 896 560 • Sales: sales@globalfire.pt • Technical Support: techs@globalfire.pt • www.globalfire.pt

TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	20 V to 30 V DC
CURRENT - SOUNDER/BEACON ACTIVE	10 mA - 280 mW @ 30 V DC
MAXIMUM SOUNDER OUTPUT	97 db (@ 1 meter - 30 V DC)
CABLE SIZE	0.5-2.5 mm ²
RESET/START-UP TIMES	20 seconds max.
COLOUR / CASE MATERIAL	Red / ABS & PC - Flame Retardant rating 94V0
OPER. TEMPERATURE	-20°C to 70°C
MAX. HUMIDITY	95% RH Non-Condensing
PROTECTION	Type B - Outdoor Use - Rating IP65
DIMENSIONS	112 (D) x 110 (H) mm
WEIGHT	315 g and 350 g inc. packaging


ORDER CODE	CERTIFICATE	DESCRIPTION
VALKYRIE CS IP65	1328-CPR-0300	CONVENTIONAL WALL SOUNDER - IP65 RATED
VALKYRIE CSB IP65	1328-CPR-0300	CONVENTIONAL WALL SOUNDER/BEACON - IP65 RATED

SOUNDER TERMINAL CONNECTIONS

Please note that this device is polarised.

Terminals

- C- Negative Supply - Continuous Tone
- P- Negative Supply - Pulsing Output
- + Positive Supply - IN

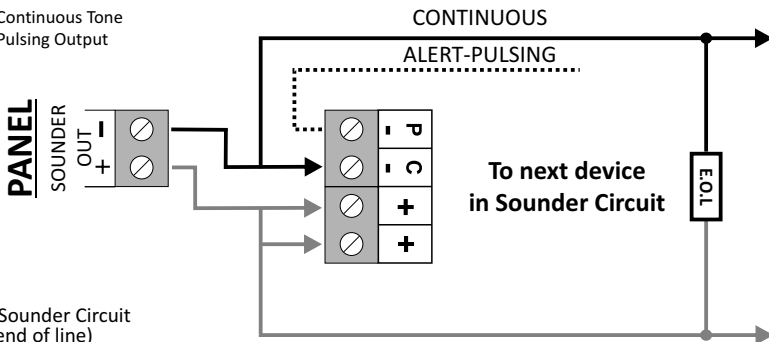

NOTE:

Only last device in Sounder Circuit should have e.o.l.(end of line) fitted across + and - terminals.

TONE SELECTION

ON (1)  OFF (0) **ALTERNATING HIGH-FREQUENCY TONE**
2.7 KHz - 3.2 KHz

ON (1)  OFF (0) **SWEEPING TONE**
800-1000 Hz

ON (1)  OFF (0) **CONTINUOUS TONE**
800 Hz

ON (1)  OFF (0) **ALTERNATING LOW-FREQUENCY TONE**
800-1000 Hz